


IPART APPROVED



Product Features:



- Energy efficient, high performance LED Flood Light
- Replaces conventional MV and MH light
- More than 50% energy savings compared to conventional lamps
- Meanwell HLG driver and Bridgelux LED used for longer lifetime
- Cross-ventilation heat sink design for better heat dissipation
- Quality fitting with baking finish treatment for excellent corrosiveness resistance
- High transparency tempered glass lens achieving more than 93% light transmittance
- 5 year replacement warranty

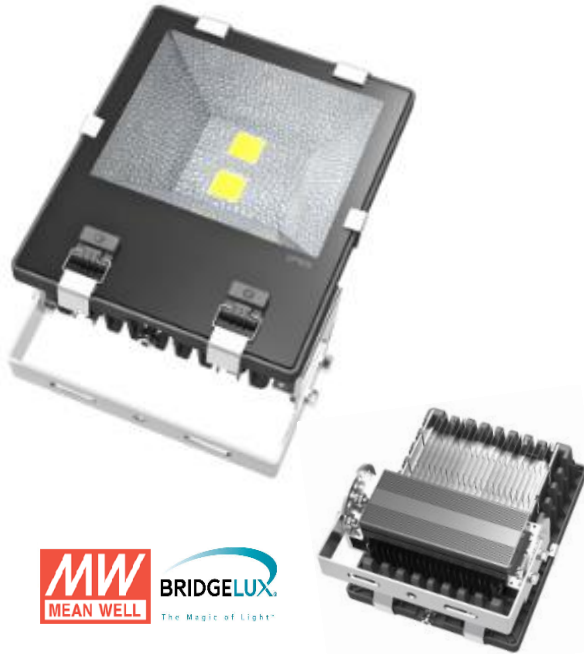

Application:

- Commercial and residential car parks
- Outdoor security lights
- Under canopy areas and loading bays

LED Flood Light F Series

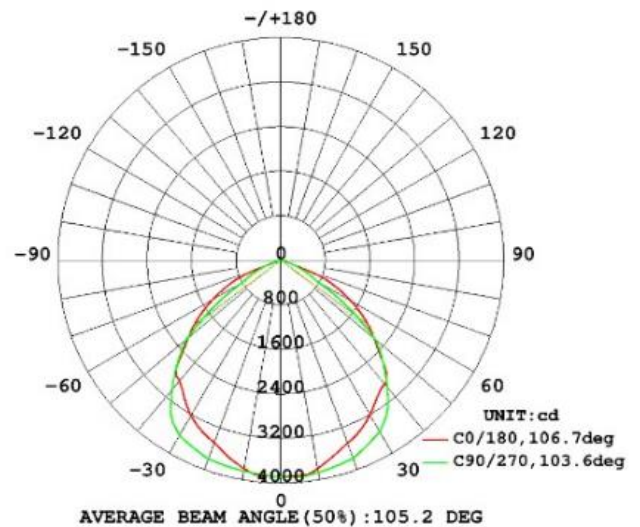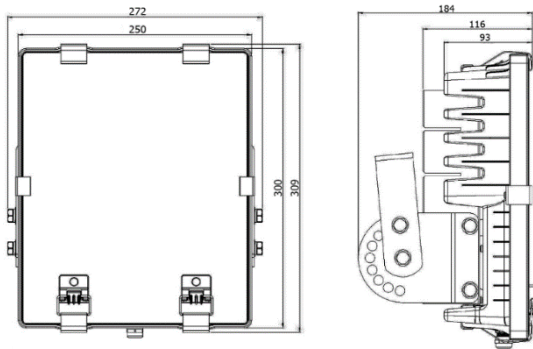

Quick Spec

- Luminous Efficacy:** 90 lm/w
- Color temperature:** 2700K- 6000K, CRI > 80
- Average rated LED life:** 50,000hrs @ L70
- Ambient temperature:** -35°C to 45°C
- Beam angle:** 105°

Model	Watts	Supply Voltage	Lumen Output	L*W*H (mm)	Weight	IP Rating
SL-FL-100WF	100W	AC85-265V,50Hz	9000lm	300*250*184	7.0Kgs	IP65